

# MF 423-3-3D

## SERIES




### Features

- Chassis Mount/Panel 3 Phase Filter 3 Wire
- General Purpose
- Compact
- Excellent Performance
- Shock Proof Terminals

### Technical Specification

- Maximum Operating Voltage: 440/520\*/600\* VAC
- Operating Frequency: 50/60Hz
- Rated Current: 10A to 250A
- High Potential test voltage:  
L to G 2120VAC FOR 250V  
L to L 1414VDC FOR 250V
- Overload Capability: 6 x Rated current for 8sec
- Temperature Range :-25 °C to 85 °c
- Earth Leakage Current : 1 mA max  
(Also available in low leakage Current)

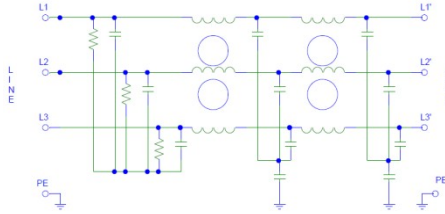

### Application

- For UPS, Special purpose machines.
- Elevators
- CNC Machines
- HVAC
- Drives
- AC/DC Drives
- SCR Drives

### Presentation

Aluminium

### Mounting

Panel/Chassis Mount


### Termination

Shock Proof Connector

### How to Order

Part No	Current Rating (Amps)	Case	Termination
MF 423-3-3D-10	10A	R7	Shock Proof Connector
MF 423-3-3D-15	15A	R7	Shock Proof Connector
MF 423-3-3D-20	20A	R7	Shock Proof Connector
MF 423-3-3D-40	40A	R7	Shock Proof Connector
MF 423-3-3D-60	60A	R7	Shock Proof Connector
MF 423-3-3D-80	80A	R4	Shock Proof Connector
MF 423-3-3D-100	100A	R4	Shock Proof Connector
MF 423-3-3D-125	125A	R4	Shock Proof Connector
MF 423-3-3D-150	150A	R4	Shock Proof Connector
MF 423-3-3D-200	200A	R6	Shock Proof Connector
MF 423-3-3D-250	250A	R6	Shock Proof Connector

### Insertion Loss

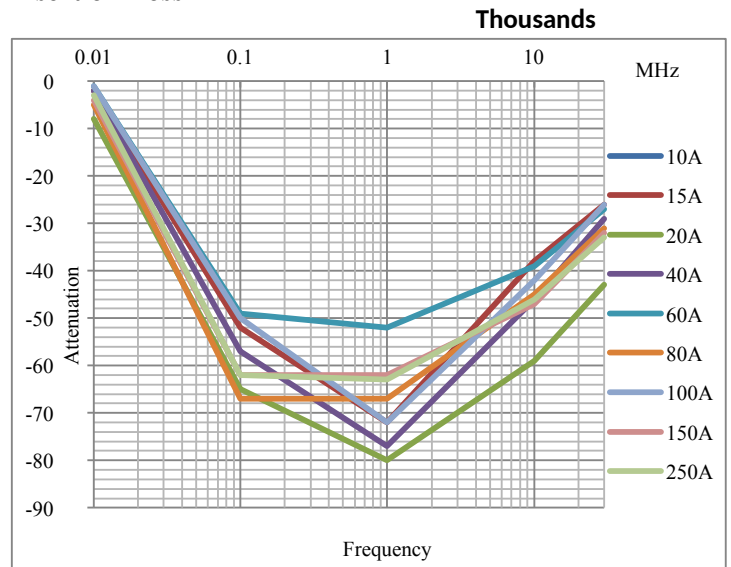

\*\* For Customised filter Contact our sales department